Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS

Motor type : 1AV3104A **SIMOTICS GP - 100 L - IM B3 - 2p**

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

Electrical data

Safe Area

U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	η 3) 4/4	η 3) 3/4	η 3) 2/4	cosφ 3) 4/4	cosφ 3) 3/4	cosφ 3) 2/4	I_A/I_N I_I/I_N	M_A/M_N T_I/T_N	M_K/M_N T_B/T_N	IE-CL
DOL duty (S1) - 155(F) to 130(B)																	
400	Δ	50	3.00	-/-	5.70	2910	9.8	87.1	87.7	87.0	0.87	0.82	0.72	9.4	4.4	4.5	IE3
690	Y	50	3.00	-/-	3.30	2910	9.8	87.1	87.7	87.0	0.87	0.82	0.72	9.4	4.4	4.5	IE3
460	Δ	60	3.45	-/-	5.60	3505	9.4	88.5	88.5	87.5	0.87	0.83	0.73	10.0	4.0	4.8	IE3
460	Δ	60	3.00	-/-	5.00	3525	8.1	88.5	88.2	86.7	0.85	0.80	0.69	11.2	4.6	5.6	IE3
IM B3 / IM 1001			FS 100 L			IP55		IEC/EN 60034			IEC, DIN, ISO, VDE, EN						

Environmental conditions : -20 °C - +40 °C / 1000 m

Locked rotor time (hot / cold) : 9 s | 12 s

Mechanical data

Sound level (SPL / SWL) at 50Hz|60Hz	67 / 79 dB(A) 2)	71 / 83 dB(A) 2)	
Moment of inertia	0.0041 kg m²		
Bearing DE | NDE	6206 2Z C3	6206 2Z C3	
bearing lifetime			
L_{10mh} $F_{Rad\ min}$ for coupling operation 50|60Hz 1)	40000 h	32000 h	
Lubricants	Unirex N3		
Regreasing device	No		
Grease nipple	-/-		
Type of bearing	Preloaded bearing DE		
Condensate drainage holes	No		
External earthing terminal	No		

Vibration severity grade	A
Thermal class	F
Duty type	S1
Direction of rotation	bidirectional
Frame material	aluminum
Net weight of the motor (IM B3)	25 kg
Coating (paint finish)	Standard paint finish C2
Color, paint shade	RAL7030
Motor protection	(A) without (Standard)
Method of cooling	IC411 - self ventilated, surface cooled

Terminal box

Terminal box position	top	Max. cross-sectional area	4 mm²
Material of terminal box	Aluminium	Cable diameter from ... to ...	11 mm - 21 mm
Type of terminal box	TB1 F00	Cable entry	2xM32x1,5
Contact screw thread	M4	Cable gland	2 plugs

Notes:

I_A/I_N = locked rotor current / current nominal
M_A/M_N = locked rotor torque / torque nominal
M_K/M_N = break down torque / nominal torque

1) L10mh according to DIN ISO 281 10/2010
2) at rated power / at full load
3) Value is valid only for DOL operation with motor design IC411

responsible dep.	technical reference	created by	approved by	*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.*	Link documents
DI MC LVM		DT Configurator			

SIEMENS

document type	document status
datasheet	released
title: **1LE1003-1AA43-4AA4**	document number

rev.	creation date	language	Page
01	2021-12-13	en	1/1

© Siemens AG 2021

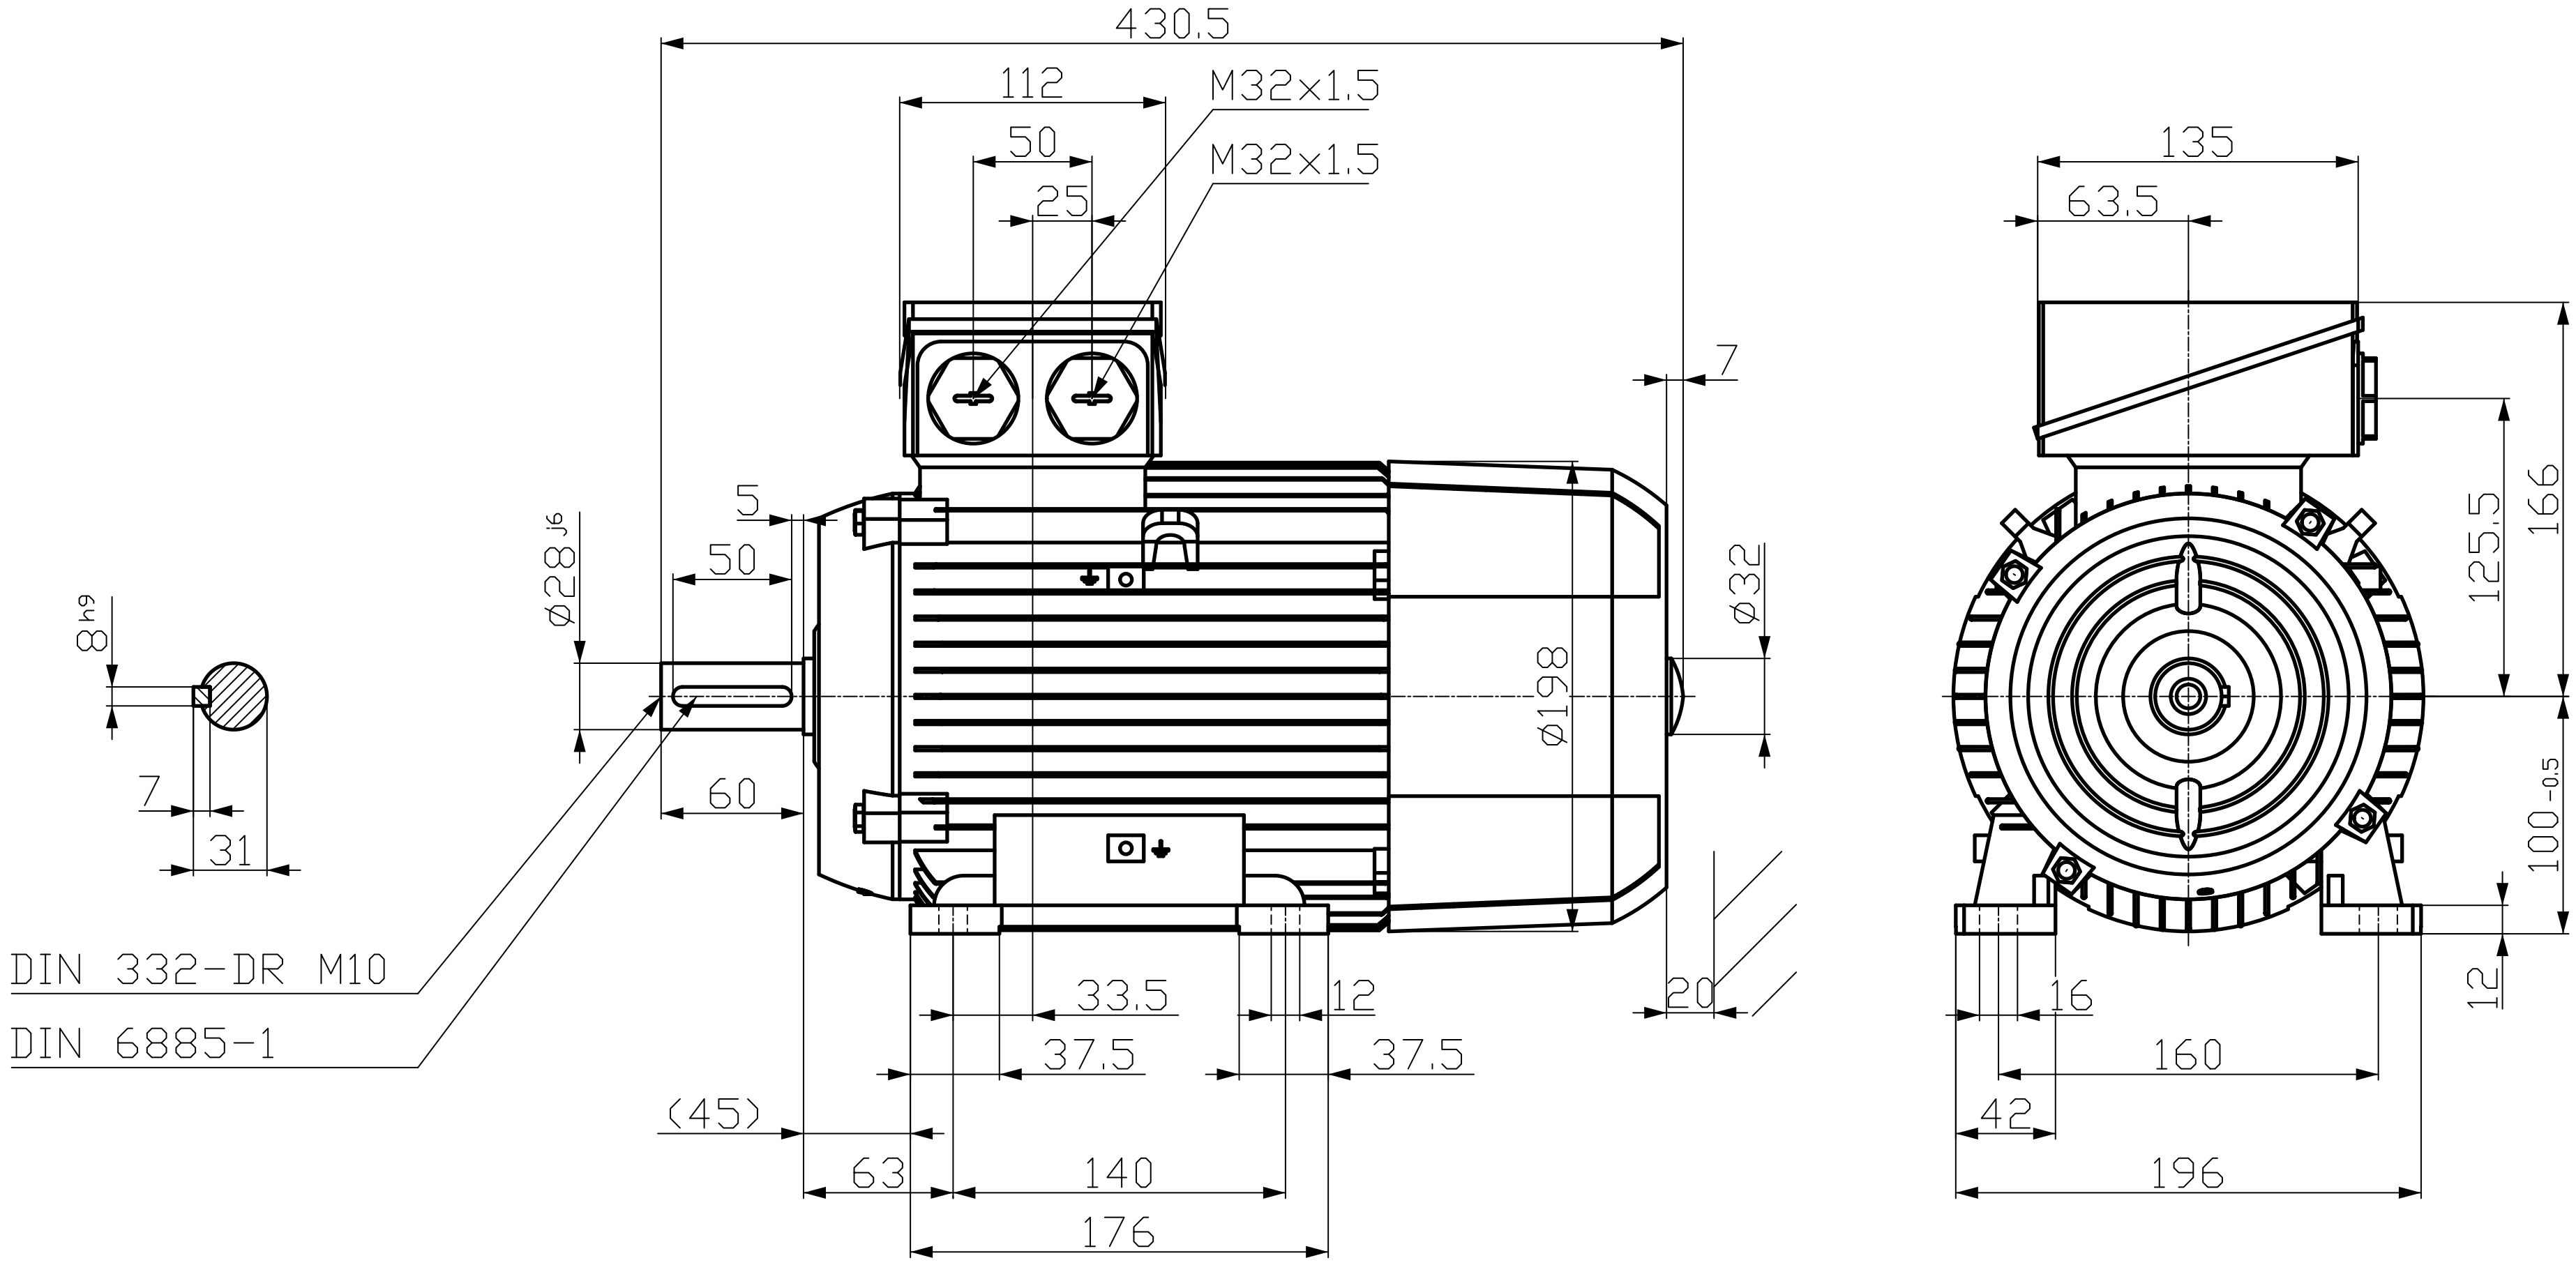

Tolerance	Surface	Material	Weight	Scale
			-	mm

1LE1003-1AA43-4AA4			
-	Author		Dimensional drawing
	Creator	DTK	Maßzeichnung
	Approval		
	Department		
	Change Order		MLFB	Doc Type /
SIEMENS	Doc State	12/13/21	Item No	Paper Size A3
	Revision Index RS		Doc No	1st Language en, 2nd Language de
© Siemens AG 2018	Project No -		Ref No -	Sheet 1 of 1

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Weitergabe sowie Vervielfältigung, Verbreitung und/oder Bearbeitung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.

Confié à titre de secret d'entreprise. Tous droits réservés.
Comunicado come secredo empresarial. Reservados todos os direitos.
Confiado como secreto de empresa. Nos reservamos todos los derechos.