

Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS



Motor type : 1CV4312A

SIMOTICS SD - 315 M - IM B3 - 2p

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

Electrical data

Safe Area

U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	η ³⁾			$\cos\phi$ ³⁾			I_A/I_N I_i/I_N	M_A/M_N T_i/T_N	M_K/M_N T_B/T_N	IE-CL
								4/4	3/4	2/4	4/4	3/4	2/4				
400	Δ	50	132.00	-/-	220.00	2988	420.0	96.2	96.2	95.6	0.90	0.90	0.86	10.5	3.1	4.0	IE4
690	Y	50	132.00	-/-	128.00	2988	420.0	96.2	96.2	95.6	0.90	0.90	0.86	10.5	3.1	4.0	IE4
460	Δ	60	148.00	-/-	215.00	3588	395.0	95.8	95.8	95.2	0.90	0.89	0.85	10.7	2.9	3.9	IE4
460	Δ	60	132.00	-/-	194.00	3590	350.0	95.8	95.7	94.9	0.89	0.89	0.84	11.8	3.3	4.3	IE4
IM B3 / IM 1001			FS 315 M		IP55		IEC/EN 60034		IEC, DIN, ISO, VDE, EN								

Environmental conditions : -20 °C - +40 °C / 1000 m

Locked rotor time (hot / cold) : 55.7 s | 55.7 s

Mechanical data

Sound level (SPL / SWL) at 50Hz 60Hz	77 / 91 dB(A) ²⁾	82 / 96 dB(A) ²⁾	External earthing terminal	Yes (standard)
Moment of inertia	1.9000 kg m ²		Vibration severity grade	A
Bearing DE NDE	6316 C3	6316 C3	Insulation	155(F) to 130(B)
bearing lifetime			Duty type	S1
L _{10mh} , F _{Rad} , min 50 60Hz ¹⁾ for coupling operation	40000 h	32000 h	Direction of rotation	bidirectional
Relubrication interval/quantity DE NDE	30 g 30 g 3000 h		Frame material	cast iron
Lubricants	Unirex N3		Net weight of the motor (IM B3)	980 kg
Regreasing device	Yes (standard)		Coating (paint finish)	Special paint finish C3
Grease nipple	M10x1 DIN 3404 A		Color, paint shade	RAL7030
Type of bearing	Locating bearing NDE		Motor protection	(B) 3 PTC thermistors - for tripping (standard) (2 terminals)
Condensate drainage holes	Yes (standard)		Method of cooling	IC411 - self ventilated, surface cooled

Terminal box

Terminal box position	top	Max. cross-sectional area	240 mm ²
Material of terminal box	cast iron	Cable diameter from ... to ...	38 mm - 45 mm
Type of terminal box	TB1 Q01	Cable entry	2xM63x1,5-2xM20x1,5
Contact screw thread	M12	Cable gland	4 plugs

Notes:



I_A/I_N = locked rotor current / current nominal
 M_K/M_N = locked rotor torque / torque nominal
 M_i/M_N = break down torque / nominal torque

1) L10mh according to DIN ISO 281 10/2010
 2) at rated power / at full load

3) Value is valid only for DOL operation with motor design IC411

responsible dep. DI MC LVM	technical reference	created by DT Configurator	approved by	<i>Technical data are subject to change! There may be discrepancies between calculated and rating plate values.</i>			
SIEMENS	document type datasheet	document status released		customer			
	title 1LE1604-3AA23-4AB4	document number					
© Siemens AG 2021	rev. 01	creation date 2021-11-03 09:25	language en	Page 1/1			

刀线管
 用文全
 图
 积
 01
 02
 03
 04
 05
 06
 07
 08
 09
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100

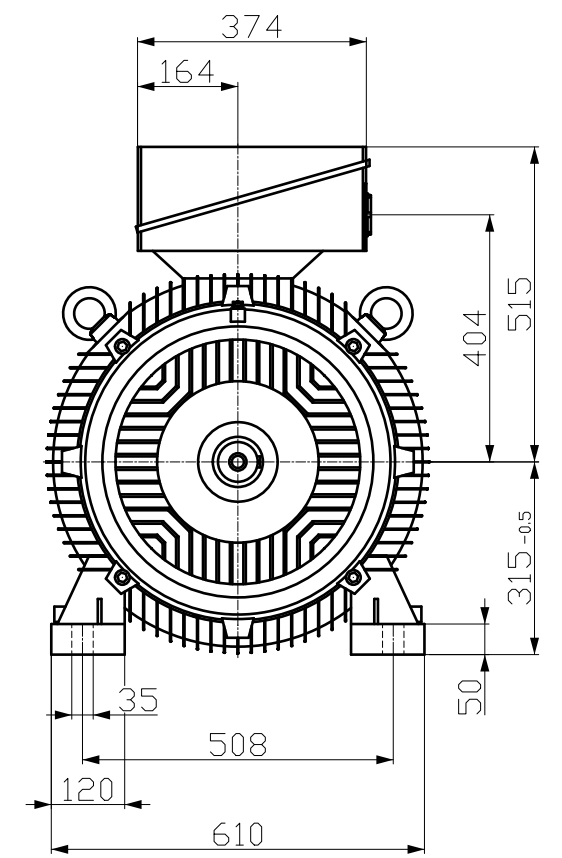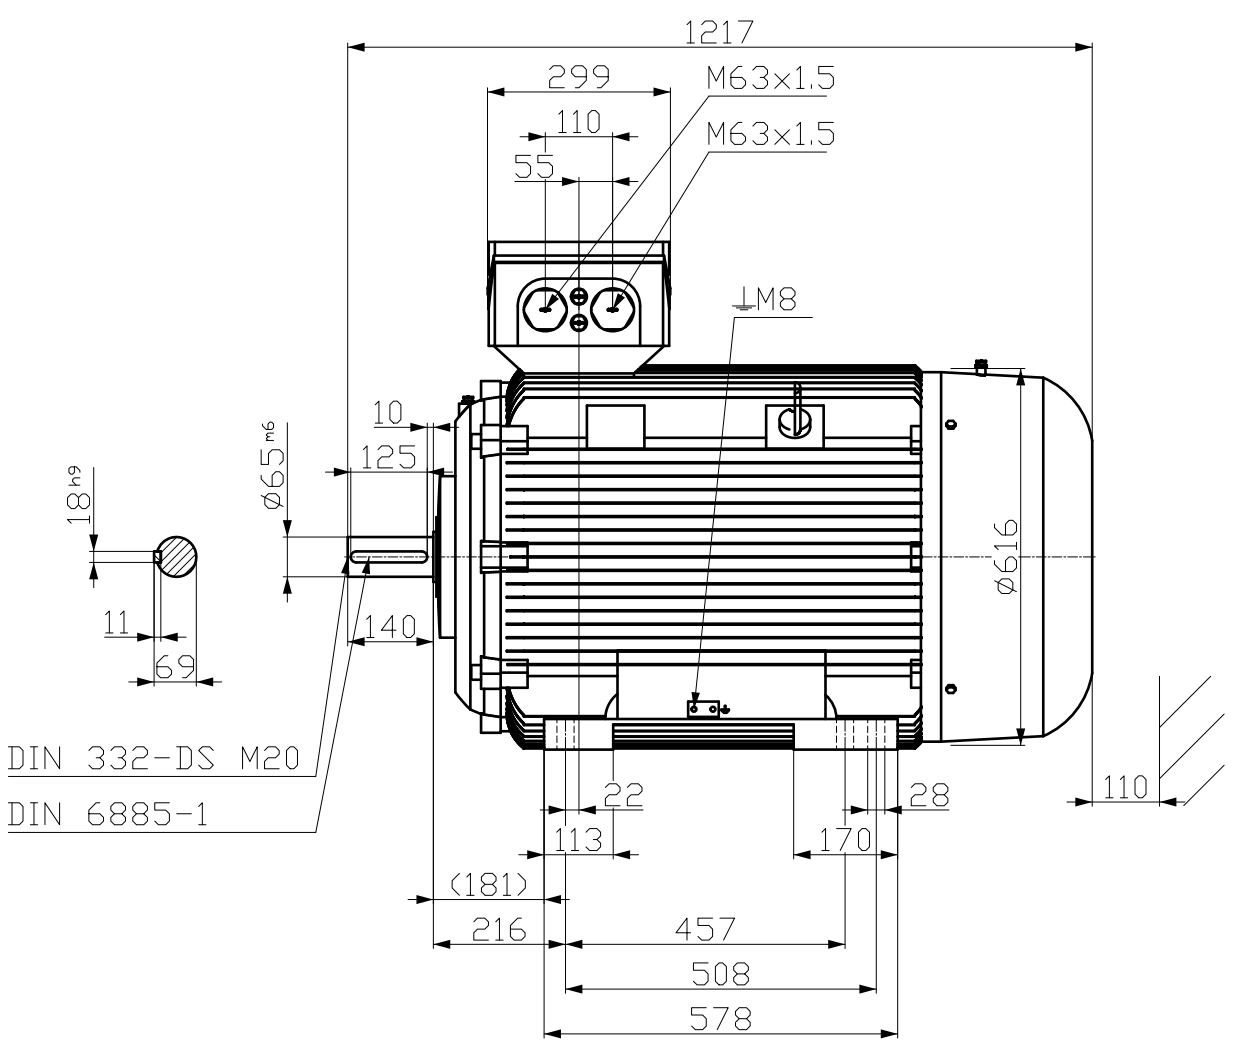

Tolerance	Surface	Material	Weight	Scale
F50 F10 E	Author Creator Approval Department Change Order	ÖVS T a : ^ & @ } *	E	{ {
	Doc. State Revision	MLFB Item No Doc No	Doc Type Paper Size	/ CH
SIEMENS	Index RS		1st Language 2nd Language	^) â ^
© Siemens AG 2018	Project No	Ref No	Sheet	F of F